


BOOSTER COILS

ROWS AVAILABLE	1	2
FPI AVAILABLE	8	10 12
TUBES OD & Wall Thickness	5/8	.020
COPPER ONLY	1/2	.016
FINS Material & Thickness	ALUM.	.006 .010
	COPPER	.006
CASING	16 GA. GALV. STEEL	
	16 GA. STAINLESS STEEL	

MODEL NO. (Example)	W : Water
	8 : 8 fpi
	1 : 1 row
	12 : Fin Height
	24 : Fin Length
	N : Non Headered

CONNECTION SIZES	
3/4 MPT	1 MPT
SUPPLY	RETURN

Mark Smith
 Coils Express, LLC.
CALL TOLL FREE OR FAX
(866)-42COILS (26457)
 mark@coilsexpress.com

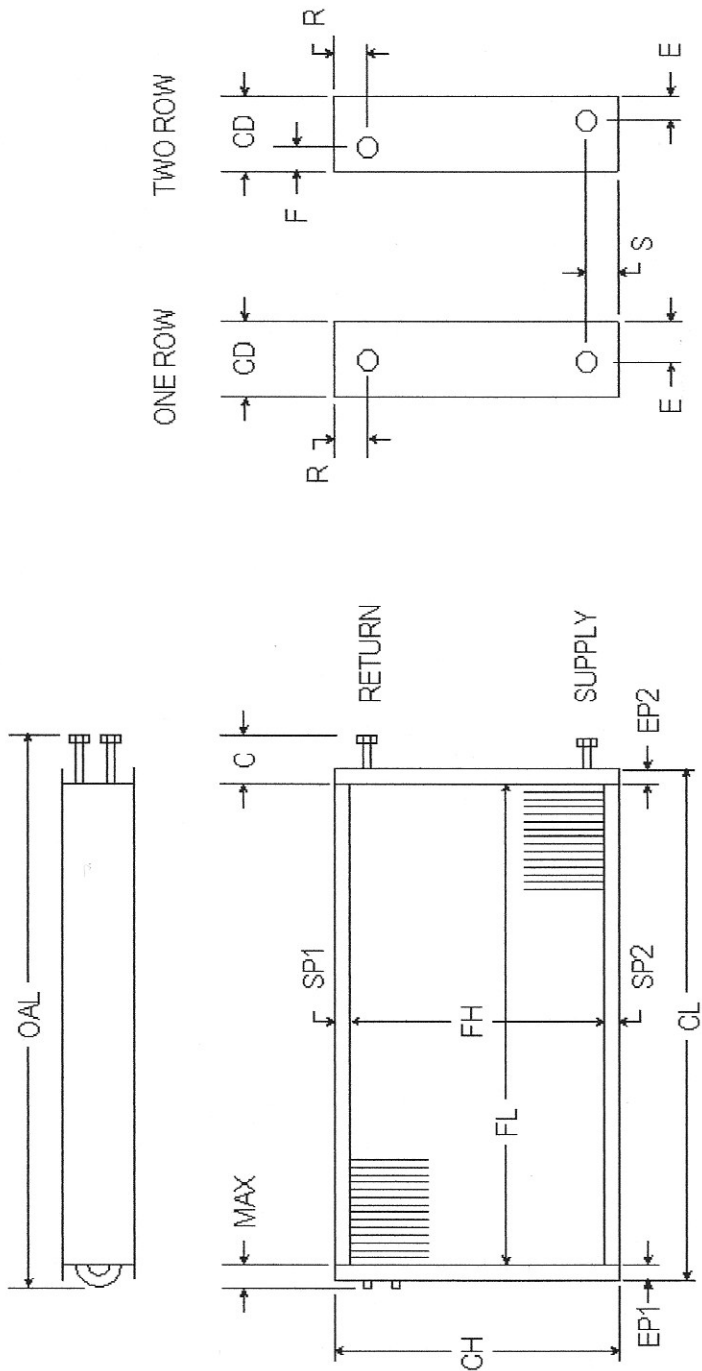

DIMENSIONAL DATA IN INCHES											OAL = MAX + FL + C				
ITEM	QTY	ROWS	FPI	SP1	FH	SP2	CH	EP1	FL	EP2	CL	CD	MAX	C	OAL
				1		1		1		1		4	2 1/4	5	CU

P.O. #	CUSTOMER
W.O. #	MODEL NO.
APPROVED BY	TAG:
DATE	NOTES

Performance Data	CFM	EDB/EWB	LDB/LWB	CAPACITY	EWT	LWT	GPM
------------------	-----	---------	---------	----------	-----	-----	-----